

1/7

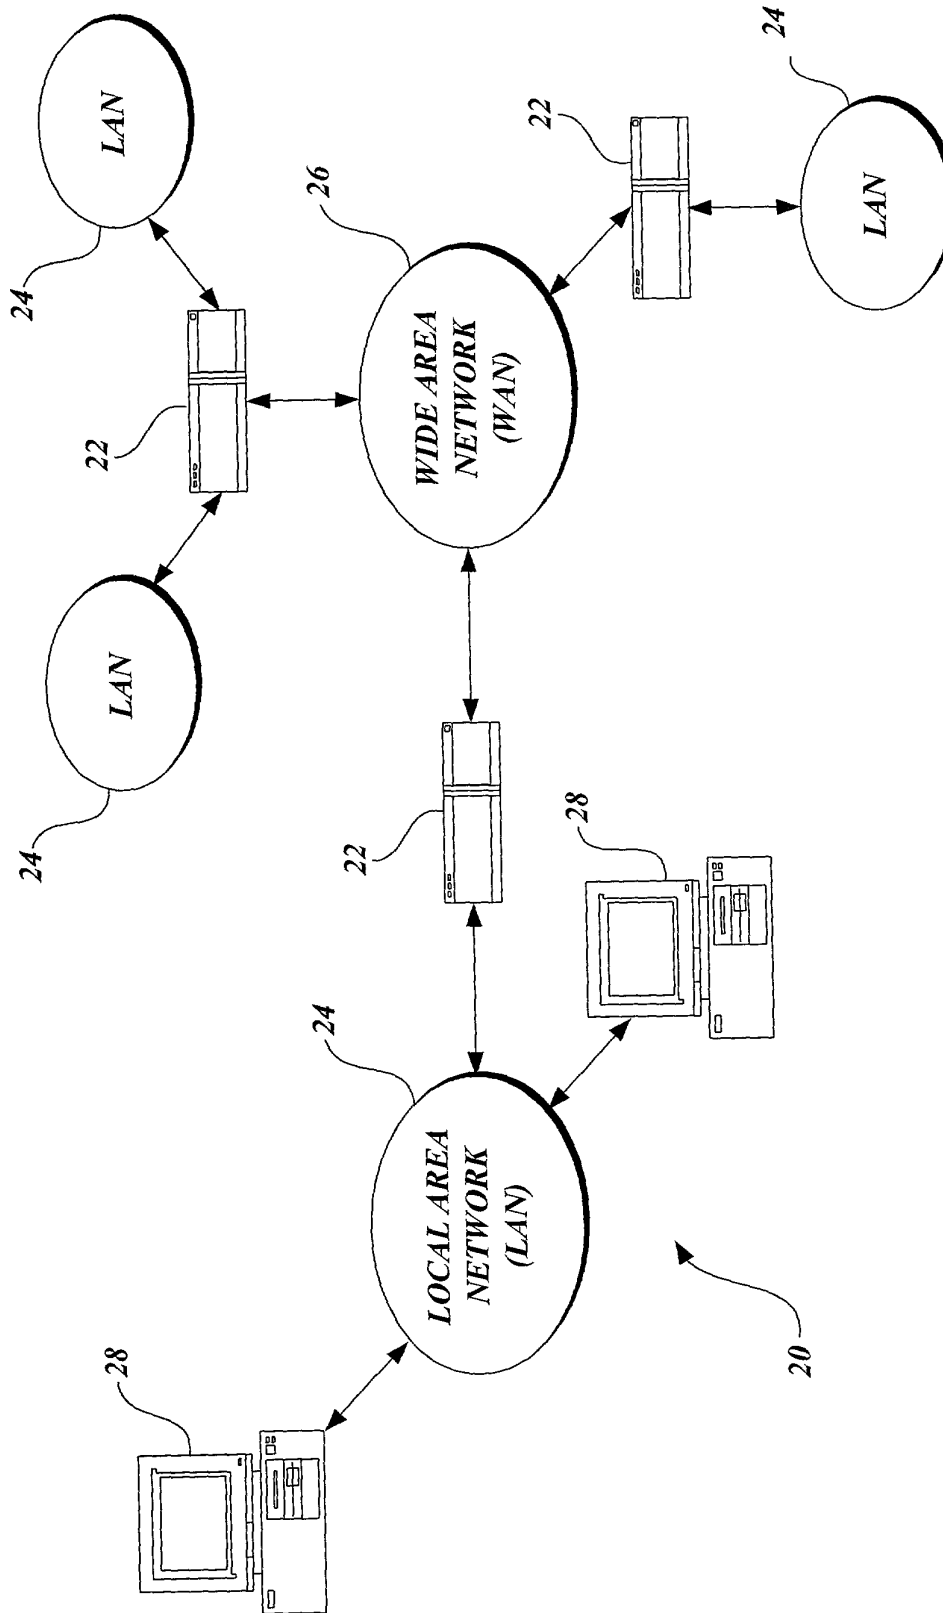


Fig. 1.

2/7

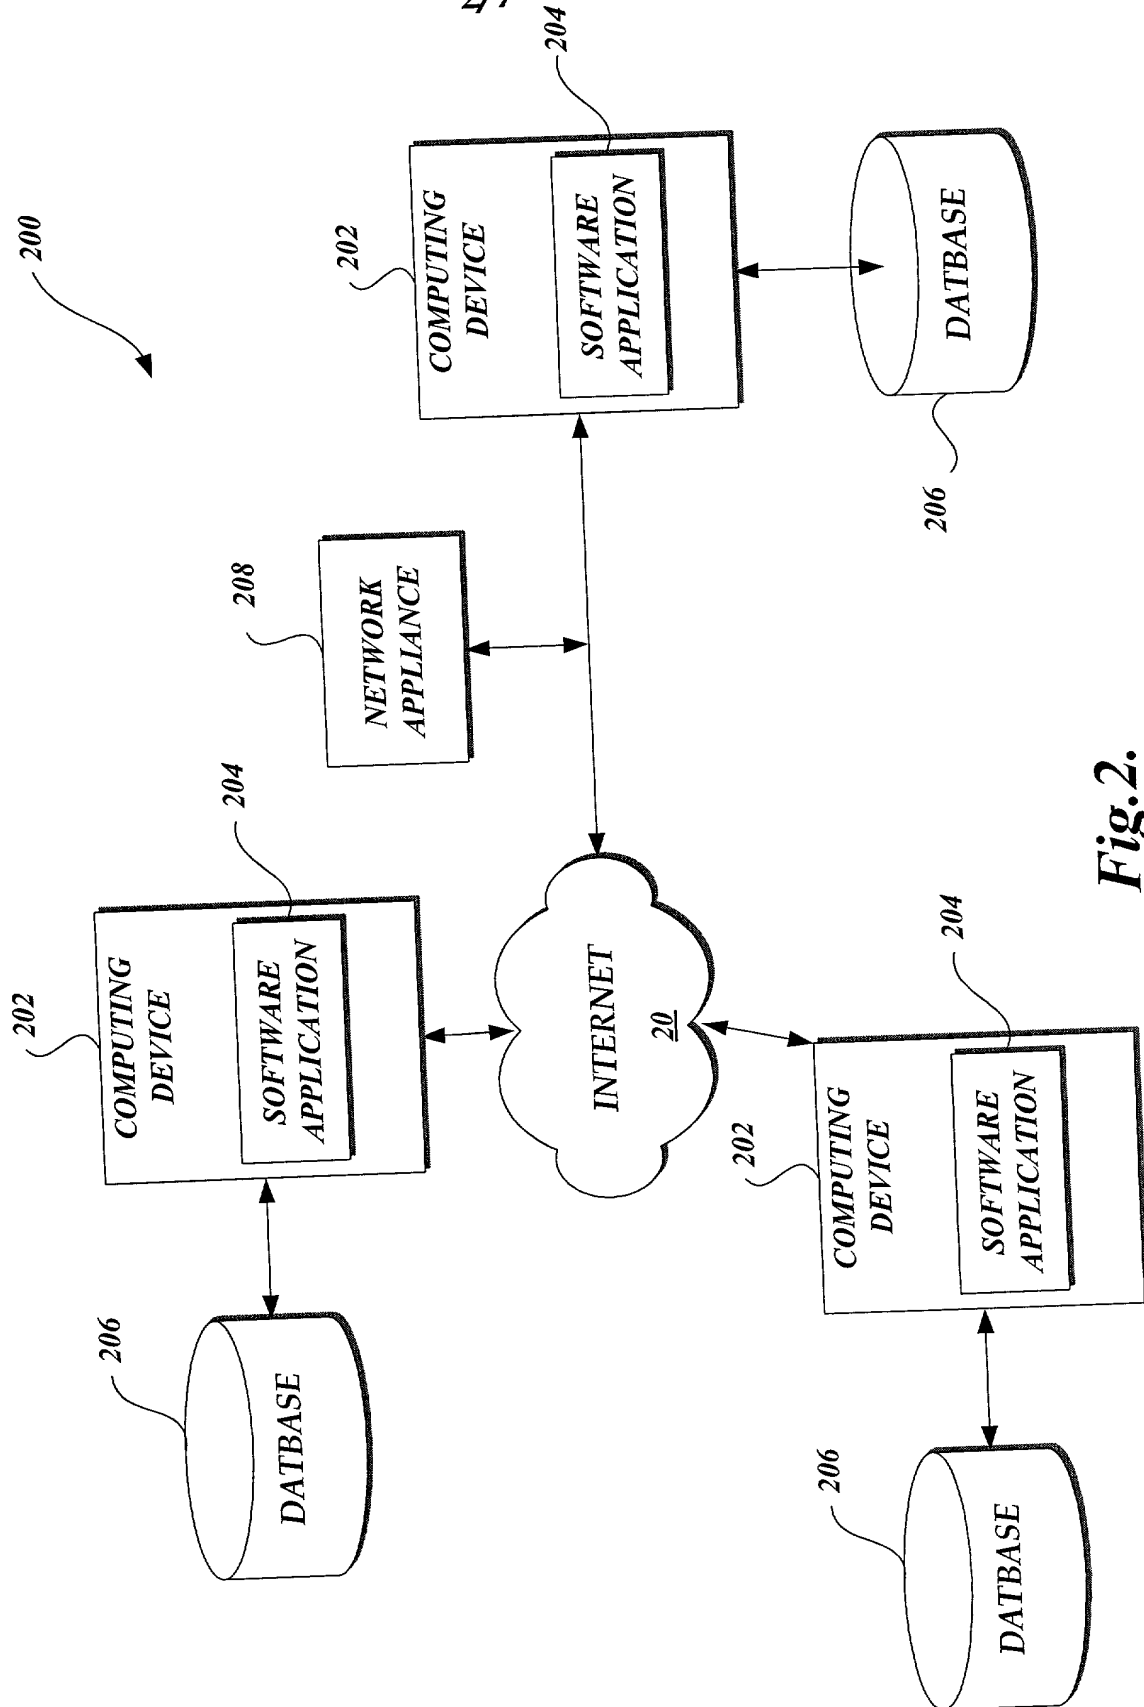
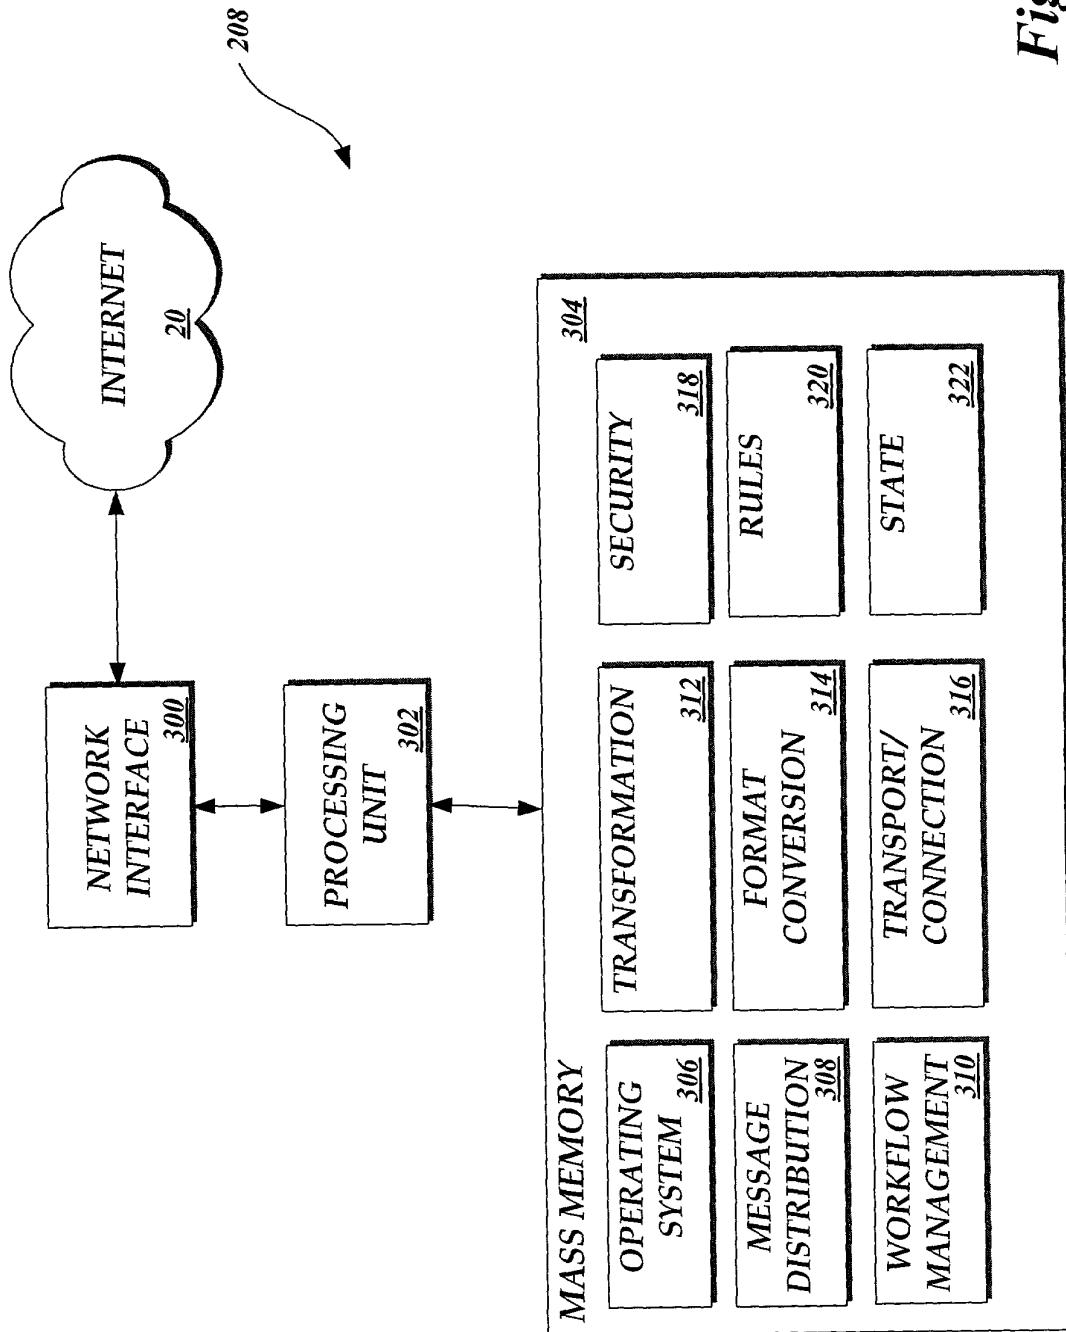


Fig.2.



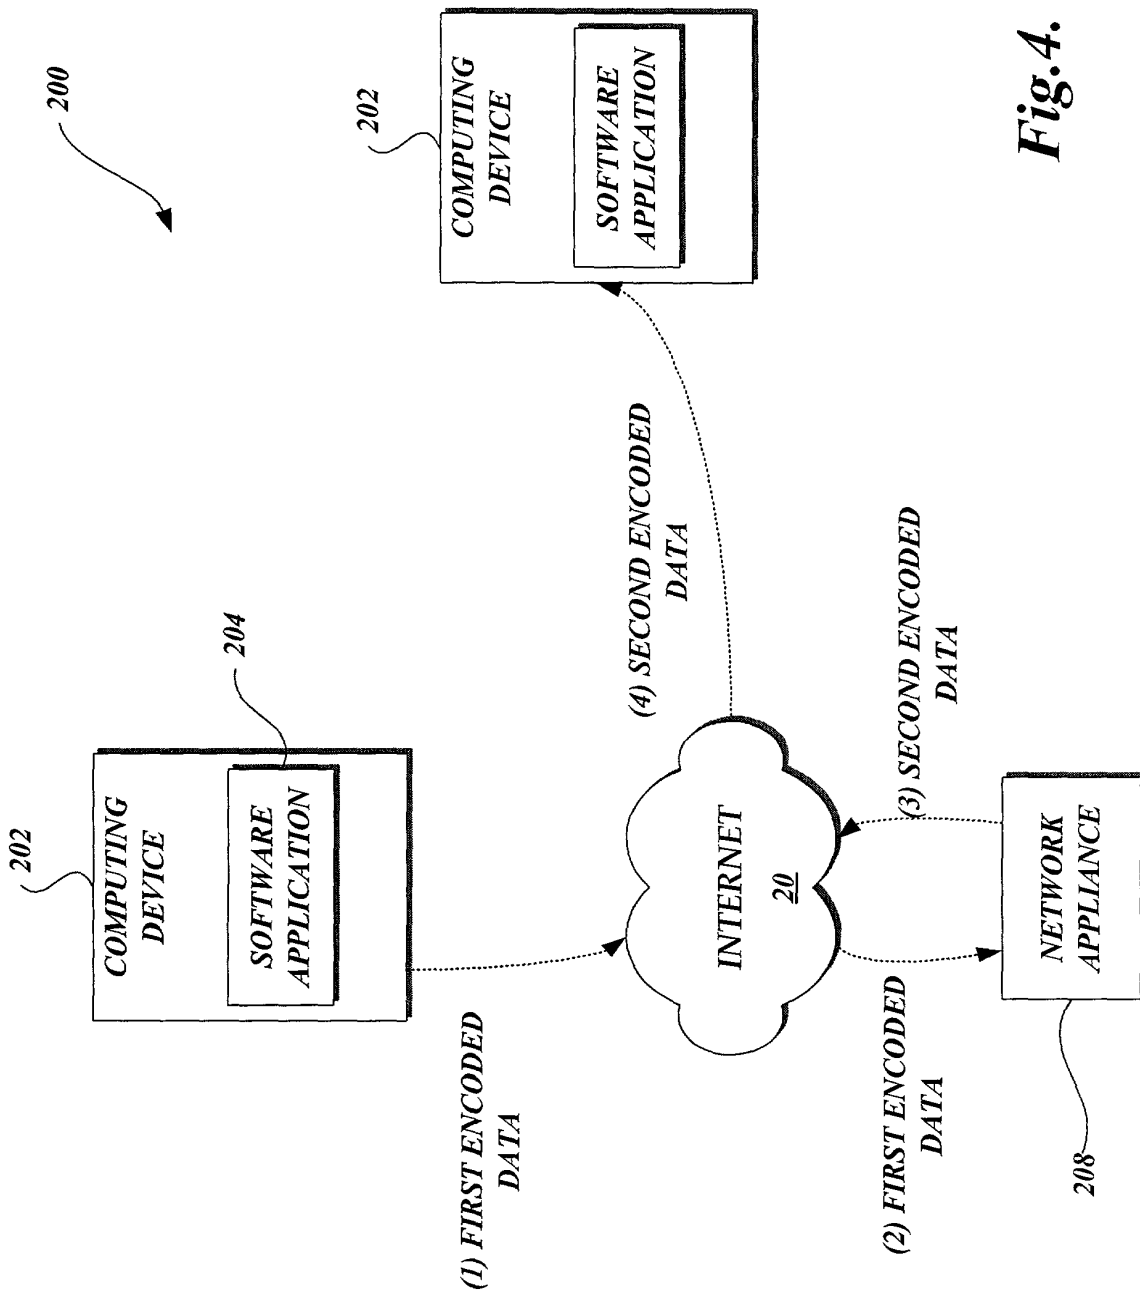


Fig. 4.

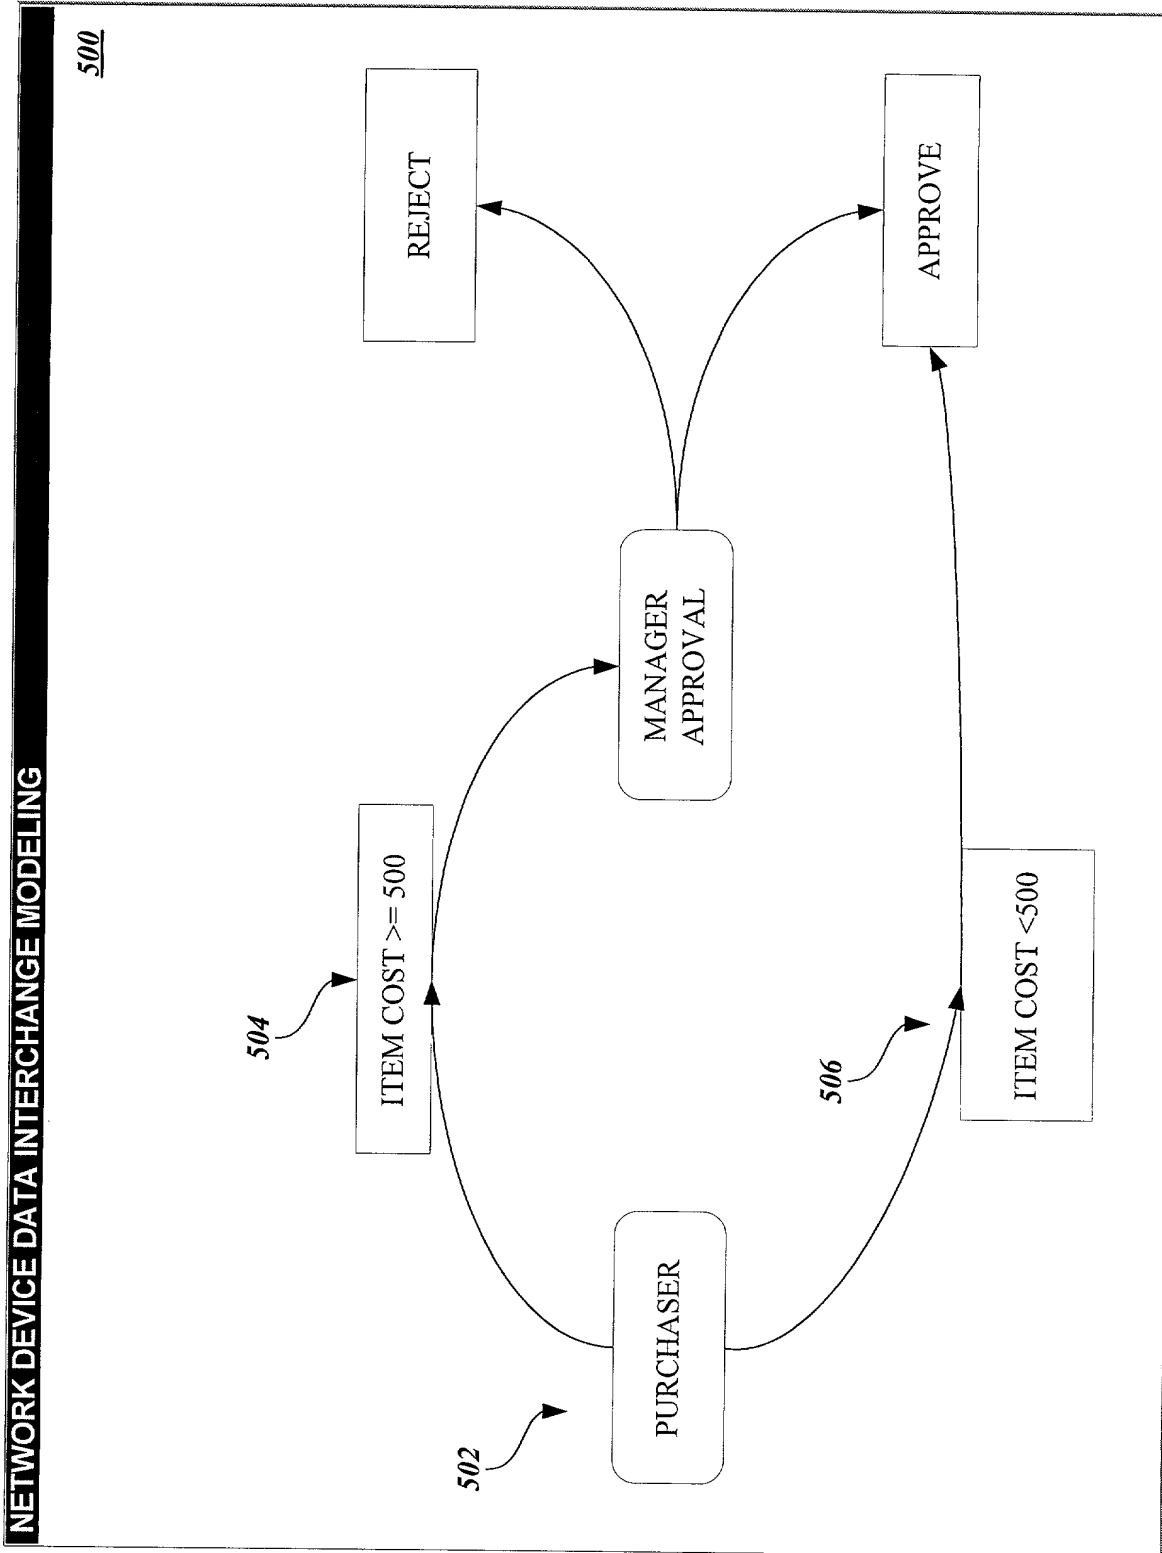


Fig. 5.

NETWORK DEVICE CONFIGURATION

600

☐ NO PROXY SERVER

☐ AUTOMATICALLY DETECT WINDOWS PROXY SETTINGS

☐ MANUALLY SET PROXY SETTINGS

HOST NAME:

PORT:

USER ID:

PASSWORD

DATA SCHEDULER
DATA INTERCHANGE

ENTER SMTP DEFAULT SERVER
NAME OR I.P. ADDRESS

ENTER E-MAIL
COMMUNICATION ADDRESS

Fig. 6.

700

NETWORK DEVICE DATABASE INTERFACE

SOURCE NAME	702	SOURCE TYPE
LOGIN	704	PASSWORD
DATA SOURCE NAME	706	IP ADDRESS
DRIVER #	708	DRIVER CLASSPATH
DATABASE TYPE		

Fig. 7.